

Villager 14 Duo



| | |
|-----------------|---------|
| Code | V14-DUO |
| Output | 14.4kW |
| Log length | 450mm |
| Nett efficiency | 73.9% |
| Width | 682mm |
| Height | 685mm |
| Depth | 489mm |

The Villager Duo range boasts modern technology and efficiencies hidden behind its grand exterior. Certain to bring character to any room with its ash lip, large glass viewing area and solid controls, it will become a gathering point during the colder Winter months.

Features

- Lifetime guarantee
- Preheated airwash system for clean glass
- Stainless steel ash pan
- Burns wood or solid fuel
- Primary and secondary burn to improve efficiency
- Top or rear flue outlet

Optional Extras

- Add In Boiler - [AIBV017]
- Arada Ash Carrier - Large - [ARA018]
- Arada Universal Stand - [STAND002]
- Universal Stand/Log Store - [STAND004]

Villager 14 Duo - Technical Information


| | |
|-------------------------------------|----------|
| Code | V14-DUO |
| Output range | 2.5-16kW |
| Nett efficiency | 73.9 % |
| Refuelling period | 1 hour |
| Width | 682mm |
| Height | 685mm |
| Depth | 489mm |
| Height to centre of rear flue | 562mm |
| Depth of back to centre of top flue | 135mm |
| Flue diameter | 152mm |
| Flue outlet | Round |
| Suitable for 12mm hearth | Yes |
| Under hearth temperature | 91.9°C |
| Suitable for direct air supply kit | No |
| Packed weight | 140kg |
| Maximum log length | 450mm |

Minimum Distance To Combustibles

| | |
|-------------------|---------|
| To rear of stove | 1250 mm |
| To sides of stove | 850 mm |
| Above stove | 457 mm |

Boiler Tapping Measurements

| | |
|------------|--------|
| Distance A | 295 mm |
| Distance B | 508 mm |
| Distance C | 383 mm |

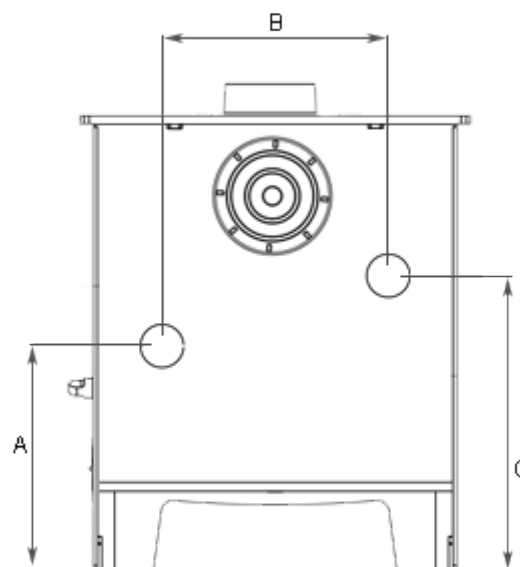

Add In Boiler Tapping Measurements.
Rear view example shown. Not to scale.